

10/506348

24 APR 2003

0509

PA 977287

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

REC'D 09 MAY 2003

WIPO PCT

March 17, 2003

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 U.S.C. § 119.

APPLICATION NUMBER: 60/506,348

FILING DATE: March 26, 2002

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS



L. Edelen

L. EDELEN
Certifying Officer

1025 U.S. PTO

Please type a plus sign (+) inside this box



Approved for use through 03/31/2002. OMB 0551-0032
U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

INVENTOR(S)					
Given Name (first and middle (if any))		Family Name or Surname		Residence (City and either State or Foreign Country)	
Ilan		SHALEV		Givatim, Israel	
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
VASCULAR COUPLING DEVICE					
Direct all correspondence to:			CORRESPONDENCE ADDRESS		
<input type="checkbox"/> Customer Number _____			<div style="border: 1px solid black; padding: 5px; width: fit-content;"> Place Customer Number Bar Code Label here </div>		
OR			Type Customer Number here		
<input checked="" type="checkbox"/> Firm or Individual Name		Roy N. Envall, Jr.			
Address		c/o Anthony Castorina			
Address		2001 Jefferson Davis Highway, Suite 207			
City		State		ZIP	
Arlington		VA		22202	
Country		Telephone		Fax	
U.S.A.		(703) 415-1581		(703) 415-4884	
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages		24		<input type="checkbox"/> CD(s), Number _____	
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets		8		<input checked="" type="checkbox"/> Other (specify)	
<input type="checkbox"/> App. _____ See 37 CFR 1.76		Assignment + Cover Sheet			
METES AND MEASURES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
<input checked="" type="checkbox"/> Filing fee is enclosed to cover the filing fees		FILING FEE AMOUNT (\$)			
<input checked="" type="checkbox"/> The inventor is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number		03-3419		\$80.00	
<input type="checkbox"/> Payment by credit card; Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE

Maler Fenster

TYPED or PRINTED NAME Maler Fenster

TELEPHONE (703) 415-1581

Date 03/26/02

REGISTRATION NO.

41,016

(If appropriate)

Docket Number:

331/02252

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C.

PTO/SB/16 (3-00)

1025 U.S. PTO
60/367263
03/26/02

VASCULAR COUPLING DEVICE**FIELD OF THE INVENTION**

The present invention relates to fluid withdrawal or delivery from a body cavity.

BACKGROUND OF THE INVENTION

5 Connection of a catheter to a blood vessel, for example a vein, is an important medical procedure that allows withdrawal of fluid, for example blood samples, or delivery of fluid, for example nutrients, for a few days up to a few weeks. In the process of fluid delivery and/or withdrawal, for example, the catheter is periodically pulled out of one vein area and inserted into another vein area, for example, every five days.

10 Figs. 1A through 1F illustrate typical prior art catheters and a variety of problems that typically occur, resulting in obstruction of fluid withdrawal, for example, from a vein 130.

Fig. 1A illustrates a catheter 118, typically comprising a hollow tube, a portion of which is typically implanted vein 130 by piercing a section of skin 102 and wall of vein 130. By so doing, a catheter front inlet 134 lies within vein 130.

15 Vein 130 is most desirable when it is located just below skin 102 so that the outline of vein 130 can be seen through skin 102. This allows a relatively painless and fast percutaneous maneuver to poke catheter 118 into vein 130. In Fig. 1F, prior art catheter 118 is shown installed percutaneously in an arm 104 into vein 130 whose outline is seen through skin 102. For the purpose of delivery of nutrients to vein 130, catheter 118, for example, is attached to a flexible sac 106 containing a fluid 108. Sac 106 is, for example, held by a hook 112 that is
20 connected to a stand 110. Fluid 108 is distributed, for example, by gravity action through catheter 118 to vein 130. Additionally or alternatively, fluid 108 is distributed with pressure, for example by a perfusion system that increases the rate of fluid movement for the purpose of decreasing the introduction span of fluid 108.

25 In prior art catheters, Figs. 1A-1F, fluids are typically transported from vein 130 through catheter front inlet 134. For example, multiple fluid samples are withdrawn from the patient through catheter front inlet 134 in vein 130. During fluid withdrawal for a moderate period of time, leaving catheter 118 in one place, such as vein 130, for as long as possible, for example several weeks, is advantageous.

30 Unfortunately, when catheter 118 is left in one place for few days or even as briefly as one day, particularly when fluid withdrawal is not on a continuous basis, blockage of catheter front inlet 134 often occurs. While blockage may occur either during fluid introduction or withdrawal from a patient, it often occurs in a shorter span of time during fluid withdrawal as blockages are pulled toward front inlet 134. During fluid introduction, for example, blockages

tend to be displaced and/or removed away from catheter inlet 134 by the pressure of the movement of fluid out of catheter 118 into vein 130. Figures 1A-1E illustrate the various blockages that occur, often more readily, during fluid withdrawal from vein 130.

Fig. 1B illustrates one form of blockage when the surrounding cavity walls 150 collapse, blocking catheter front inlet 134. Fig. 1C demonstrates another form of blockage where a clot 160, consisting of solid particles from body fluid, forms and blocks catheter front inlet 134. Clot 160, for example, may form either beyond front catheter inlet 134, as shown, or within catheter 118, in either case preventing fluid withdrawal. Fig. 1D demonstrates another form of blockage where a section of inflamed tissue 170 blocks front inlet 134. Fig. 1E illustrates still another form of blockage that occurs when vein valves 194, a regularly occurring part of the body's vein system, block inlet 134.

In all of these cases, vein 130 becomes unsuitable, often permanently, for further fluid withdrawal. When vein 130 becomes unsuitable, catheter 118 must be taken out of vein 130 and inserted into another vein 130. Unfortunately, besides the discomfort associated with reinsertion of catheter 118 into vein 130, there is a limit to the number of fluid exchange areas, such as vein 130, that, for example, may be percutaneously accessed with catheter 118.

When easily accessed venous fluid withdrawal areas are exhausted, less optimal areas must be utilized, such as, for example, veins that are somewhat tortuous, often requiring more than one attempt for a successful introduction of catheter 118 into vein 130. Eventually, when percutaneously accessible fluid exchange areas are exhausted, fluid withdrawal for introduction, for example, can take place only through alternative means, such as a surgically placed shunt. The placement of a shunt is a relatively expensive and hazardous procedure in comparison to percutaneous access of vein 130 with catheter 118.

Zumschlange, US Patent 6,077,248 teaches a catheter that is used for fluid withdrawal from body cavities with a needle that retracts into a flexible housing to prevent the needle from causing tissue damage due to tissue movement against the needle.

SUMMARY OF THE INVENTION

An aspect of an embodiment of the present invention provides a catheter with an opening at its tip for the purpose of fluid withdrawal from a vein, with one or more extendible extensions that aid in this process of fluid withdrawal. Said extensions maintain at least two positions in relation to said catheter, one position being near said catheter and a second position away from said catheter. When these one or more extensions are positioned away from the catheter, they aid in fluid withdrawal from a vein, for example, in one or more of the following manners:

a) removing and/or displacing tissue or a blockage from a catheter;
 b) transposing a catheter inlet away from tissue or a blockage;
 c) aiding in the break-up and/or evacuation of blocking material such as a clot that forms outside the catheter;

5 d) opening one or more coverings that prevent clots from forming inside the catheter;
 e) distancing venous valves from a catheter inlet so they do not block fluid withdrawal.

In an embodiment of the invention, one or more balloon extensions fill with fluid and expand, thereby moving away from the catheter. In another embodiment of the invention, one or more deformable extensions deform at a deformation area and extend away from said
 10 catheter. In another embodiment of the invention, one or more resilient extensions are contained within a sheath and, upon being released from the sheath, extend away from the catheter.

In an embodiment of the present invention, extension of the extensions is operated manually. Alternatively, extension of the extensions is operated by an automatic mechanism
 15 that is powered, for example, by a motor.

In various embodiments of the present invention, extension of the extensions takes place prior to, during and/or following fluid withdrawal. Additionally or alternatively, extension of the extensions takes place irrespective of fluid withdrawal from a vein, for example, periodically.

20 In an embodiment of the invention, a catheter with one or more extendible extensions has one or more side openings in its wall for fluid withdrawal in addition to that of the catheter front inlet. When said extensions are extended away from the catheter, the one or more side openings in the walls are optionally covered, thereby preventing body fluid from entering the catheter and forming a clot. When the extensions extend away from the catheter, the one or more side
 25 opening covers are transported from the side openings and fluid withdrawal is allowed through the side openings. Said side openings allow fluid withdrawal even when the opening at the catheter tip is blocked.

In an embodiment of the invention, the covers that cover and are transported from the side openings are part of the extensions. Additionally or alternatively, the covers consist of
 30 body tissue that covers and is displaced from the side openings by the extension of the extensions.

In an embodiment of the invention, a catheter is provided with one or more extendible extensions that extend to aid in removing and/or displacing blockages during introduction of fluid into a vein. Additionally or alternatively, a catheter is provided with one or more

extendible extensions that extend to aid in removing and/or displacing blockages during withdrawal and/or introduction of fluid from other blood vessels, for example an artery. Additionally or alternatively, a catheter is provided with one of more extendible extensions that extend to aid in removing and/or displacing blockages during withdrawal and/or introduction of fluid from body cavity, for example, a pleural sac.

An apparatus that is pierced through a body tissue and implanted in a vein for the purpose of intake of fluid, comprising a hollow tube with an aperture and one or more extensions that are operative to at least two positions near said aperture, with a first position near said aperture and a second position away from said aperture, wherein extension of said extensions from said first position to said second position in relation to said aperture, displaces fluid intake impediments from said aperture.

Optionally, said aperture comprises an opening at said front end of said tube. Alternatively, said aperture comprises one or more openings in said side of said tube or said aperture comprises an opening at said front end of said tube and one or more openings in said side of said tube.

Optionally, said impediment comprises an aggregate of solid material. Optionally, said impediment forms beyond said hollow tube. Alternatively said impediment forms within said hollow tube. Alternatively, said impediment comprises a venous valve. Optionally, said impediment comprises a body tissue that is, for example, inflamed.

In an embodiment of the invention said hollow tube is implanted in a vein for the purpose of intake of fluid for a period of one or more weeks. Optionally, said hollow tube is implanted in a vein for the purpose of unimpeded intake of fluid for a period of one or more weeks. Optionally, said hollow tube includes one or more ports in addition to said aperture for withdrawal of fluid.

In an embodiment of the invention, said rear end of said one or more extensions is attached to an activating mechanism. Optionally, said activating mechanism causes said extensions to extend from said first position to said second position. Alternatively said activating mechanism causes said extensions to extend from said second position to said first position. Alternatively, a portion of said activating mechanism comprises a locking mechanism that, when unlocked, allows said extensions to extend from said first position to said second position.

In an embodiment of the invention, a portion of said activating mechanism is external to said body tissue. Alternatively, a portion of said one or more extensions is external to said

body tissue. Optionally, the activating mechanism is manually activated. Alternatively, the activating mechanism is automatically activated.

5 In an embodiment of the invention, said extension of said extensions occurs prior to said fluid withdrawal. Alternatively, said extension of said extensions occurs during said fluid withdrawal or following said fluid withdrawal. Optionally said extension of said extensions takes place irrespective of fluid exchange.

10 In an embodiment of the invention, the extension front of said one or more extensions, overlaps said front end of said tube when said extensions are either in a first position or a second position. Alternatively, the front end of said tube overlaps the extension front of said one or more extensions when said extensions are either in a first position or a second position.

In an embodiment of the invention, said apertures are periodically covered by said one or more extensions. Alternatively, said apertures are periodically covered by said body tissue.

15 In an embodiment of the invention, one or more of said catheter and said extensions comprise a material that prevents or retards aggregation of solids from said body fluid. Alternatively, one or more of said catheter and said extensions comprise a material that prevents or retards clot formation. Optionally, one or more of said catheter and said extensions comprise a material that prevents or retards body tissue inflammatory response. Optionally, one or more of said catheter and said extensions comprise a material that prevents or retards body tissue inflammatory response. Optionally, one or more of said catheter and said
20 extensions comprise a material that prevents or retards bacteria colonization or prevents or retards bacteria colonization.

In an embodiment of the invention, the one or more extensions comprise balloons. Optionally, said one or more balloons expand when filled with expansion fluid.

25 In an embodiment of the invention, said activating mechanism consists of a reservoir containing expansion fluid connected to said one or more balloon extensions wherein said expansion fluid is periodically transferred from said reservoir to said one or more balloons, causing expansion of said one or more balloons. Optionally, said expansion fluid contains a suspended material that prevents or retards aggregation of solids. Optionally, said expansion fluid contains a suspended material that prevents or retards body inflammatory response.
30 Optionally, said expansion fluid contains a suspended material that prevents or retards bacteria colonization. Optionally said balloons are permeable to said suspended material.

In an embodiment of the invention, the one or more extensions comprise an extension with a deformable area. Optionally, when said deformable area deforms, said extension extends from said first position to said second position. Optionally, when said extension

extends from said second position to said first position, said deformable area returns to its pre-deformed state.

In an embodiment of the invention, the one or more extensions comprise resilient extensions. Optionally, at least a portion of the activation mechanism for said one or more resilient extensions comprises a sheath.

In an embodiment of the invention, said resilient extensions maintain said first position when at least a portion of said resilient sections is contained within said sheath, and said resilient extensions maintain said second position when at least a portion of said resilient sections is external to said sheath. Optionally, movement of said sheath from a position near said extension piece front to a position near said extension piece rear, causes at least a portion of said resilient extensions to exit said sheath, and movement of said sheath from a position near said extension piece rear to a position near said extension piece front, causes at least a portion of said resilient extensions to enter said sheath.

In an embodiment of the invention, said fluid withdrawal comprises fluid introduction into said vein. Alternatively, said tube is implanted in a body tissue. In an embodiment of the invention, said body tissue comprises one of the following: a vein, a venous sinus, an artery, or an area containing fluid such as a pleural sac, an infectious sac and an alveoli.

BRIEF DESCRIPTION OF THE DRAWINGS

Exemplary non-limiting embodiments of the invention will be described with reference to the following description of embodiments in conjunction with the figures. Structures, elements or parts which appear in more than one figure are generally indicated by the same or similar number in all the figures in which they appear, in which:

Fig. 1A is a schematic side view of a catheter in a healthy vein, according to a prior art embodiment;

Fig. 1B is a schematic side view of a catheter in a partially collapsed vein, according to a prior art embodiment;

Fig. 1C is a schematic side view of a catheter in an obstructed vein, according to a prior art embodiment;

Fig. 1D is a schematic side view of a catheter in an inflamed vein, according to a prior art embodiment;

Fig. 1E is a schematic side view of a catheter in a vein, according to a prior art embodiment;

Fig. 1F is a view of a catheter installed in an arm vein, according to a prior art embodiment;

Fig. 2A is a cut-away side view of a catheter with multiple balloon extensions within a vein, according to an exemplary embodiment of the present invention;

Fig. 2B is a frontal view of a catheter with multiple balloon extensions, according to an exemplary embodiment of the present invention;

5 Fig. 2C is a frontal view of a catheter with a conical balloon extension, according to an exemplary embodiment of the present invention;

Fig. 2D is a frontal view of a catheter with multiple finger balloon extensions, according to an exemplary embodiment of the present invention;

10 Fig. 3 is a schematic side view of a catheter with multiple deformable extensions, according to an exemplary embodiment of the present invention;

Fig. 4 is an elevational view of a catheter with multiple deformable extensions, according to an exemplary embodiment of the present invention;

Fig. 5 is a schematic side view of a catheter with resilient extensions, according to an exemplary embodiment of the present invention; and

15 Fig. 6 is a frontal view of a catheter with resilient extensions, according to an exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

20 In an aspect of an embodiment of the present invention a portion of catheter 118 is provided with one or more extendible extensions, in one or more configurations, that aid in fluid withdrawal from vein 130. Fig. 2A is a cut-away side view of balloon extensions 122 extending away from said catheter 118. Balloons 122 extend away from catheter 118 when they are caused to expand by the introduction of expansion fluid 166, such as sterile water, saline, oxygen or nitrogen, introduced through expansion inlet 124. Extension of balloon extension 122 away from catheter 118 aids in preventing, or prevents, blockage of
25 catheter 118 in one of the ways noted above.

Expansion inlet 124 through which expansion fluid is introduced into balloon extension 122, is, for example, attached to a reservoir 126, located outside surface 102, containing expansion fluid 166. Squeezing flexible reservoir 126 forces expansion fluid 166 into balloon extensions 122, causing their extension. Additionally or alternatively, reservoir
30 126 has rigid walls and a pump mechanism, similar to the design of a syringe. In this embodiment, expansion fluid 166 is pumped from reservoir 126 as one would express fluid from a syringe. Once expansion fluid 166 has caused extension of balloon extensions 122, release of pressure on reservoir 126 allows the pressure of a balloon extension skin 212 to push fluid out of balloon extensions 122, back into reservoir 126.

In an embodiment of the present invention when balloon extensions 122 expand to a position where they are extending away from said catheter 118, catheter front inlet 134 extends beyond a front edge of balloon extensions 172. Movement of catheter front inlet 134 aids in physically pushing against a blockage removing and/or displacing a blockage, thereby helping to open a passageway. Alternatively, when balloon extensions 122 expand, front edge 172 expands to a position beyond catheter front inlet 134. In this embodiment, blockages that have adhered to catheter front inlet 134 and front edge 172, lose their adhesion to catheter front inlet 134 due to this movement. With expansion of balloon extensions 122, the blockage further loses its adhesion to front edge 172 so the blockage moves and/or is displaced with the flow of fluid, allowing fluid exchange.

In an embodiment of the invention, different catheters 118 and balloon extensions 122 are placed in veins 130 for different lengths of time, for example, up to a week, up to a month and over a month. Each of these time periods can create different problems, which may make different catheter 118 designs desirable to ensure smooth fluid withdrawal from vein 130.

Examples of differences in implantation time for which different designs of catheter 118 may be desirable, include: a) damage to vein 130 and surrounding tissue, b) tissue inflammation, c) fluid coagulation and/or, d) local infection in vein 130.

Catheter 118 may be sucked into catheter front inlet 134 during fluid withdrawal, as shown in Fig. 1E, during the first week of implantation. Between one week and one month, catheter 118 may pierce vein wall 130, weakening it greatly and may actually pierce through vein wall 130 causing sporadic blood leakage into surrounding tissue. An operator may pull back catheter 118 during fluid withdrawal to center catheter inlet 134 in vein 130 during fluid withdrawal.

For periods of implantation greater than a month, the hole in vein wall 130 may enlarge to the point of remaining open continually, with blood leakage from vein 130 dispersing in the tissue surrounding vein 130. With significant leakage of blood into tissue surrounding vein 130, patient anemia and weakness can result.

In addition to physically piercing vein wall 130, inflammation, the body's reaction to a foreign body, may begin to occur during the first week of implantation of catheter 118. Inflammation may continue so that during the first month of implantation, vein 130 may appear as in Fig. 1D with accompanying impediment of flow through catheter tip 134. Inflamed tissue 170 may continue to thicken past the first month, resulting in a buildup of tissue outside vein walls 130, impinging on surrounding blood flow and tissue function.

Fluid coagulation often occurs in the first week and may progress until there is a clot 160 as illustrated in Fig. 1C during the period of one week to one month. Following one month, clot 160 may increase in size until it becomes a bolus from which pieces break off that can cause tissue and/or organ damage around the body. Pieces that break off clot 160 may cause, for example, amaurosis fugax, periodic blockage of vision as the clot pieces pass through the eye. However, such signals are not always the case and a stroke or heart attack may result from embolism blockage caused by the traveling clot pieces.

Clot 160 and/or inflammation 170 may provide a nidus for bacteria growth so that during the period of one week to one month, local infection may form in vein 130 near catheter inlet 134. A local infection in vein 130 may appear as a small red area on arm 102 in Fig. 1F, often surrounding the insertion point of catheter 118. From one week to one month, the local infection in vein 130 may present with a red streak along the length of arm 102, a sign that the infection has spread along the local lymph nodes. Beyond one month, pain and swelling in the lymph nodes, for example, may accompany the red streak, signifying infection spread to the lymph nodes and possibly beyond.

Modifications, often significant, in the design of catheter 118 and balloon extensions 122 may be desirable based upon the period in which catheter 118 is to be implanted in vein 130. In an exemplary embodiment of the present invention, extension of balloon extensions 122, occurs prior to, during and/or following fluid withdrawal, for example, when catheter 118 remains in vein 130 for up to a week. Further, when catheter 118 remains in vein 130 for up to a week, expansion of balloon extensions 122, for example, or other extension embodiments, may be manually controlled, for example by an operator. In a manual control, an operator, for example, squeezes reservoir 126, causing fluid to expand balloon extensions 122.

However, when catheter 118 remains in vein for a month or more, vein 130 may have a tendency to react to catheter 118 forming, for example, inflammation and/or swelling along its walls that block catheter 118. When catheter 118 remains in vein 130 a month or longer, extension of balloon extensions 122 for example, may be irrespective of fluid withdrawal. For example extension of balloon extensions 122 may be every hour or half hour additionally or alternatively to extension of balloon extensions 122 prior to, during and/or following fluid withdrawal. When expansion of balloon extensions 122 occurs irrespective of fluid withdrawal, extension is controlled, for example, by a mechanism. In automatic control, a mechanically induced squeezing pressure from a pump mechanism, for example, forces fluid from reservoir 126, causing expansion fluid 166 to expand balloon extensions 122.

Further design changes, often significant, based upon the type of drugs included in the structure and/or released by catheter 118 and/or balloon extensions 122 may be desirable. In an exemplary embodiment fluid within balloon extensions 122 with semipermeable balloon extension skin 212 contain a drug or drugs that prevent and/or inhibit aggregation of solids from body fluid. In catheters 118 that are implanted for a short term, for example one week or less, optionally a short-acting anti-aggregate may be utilized. In catheters that are implanted for a longer term, for example more than a week and less than a month, a longer acting anti-aggregate may be utilized. In catheters that are implanted for longer than a month, additional anti-aggregates may be used, for example warfarin sodium, that affects the coagulatory tendency of blood solids may be included.

In an exemplary embodiment fluid within balloon extensions 122 with semipermeable balloon extension skin 212 contain a drug or drugs, for example a steroid, that prevent and/or inhibit body inflammatory response to catheter 118 and/or its extensions. In catheters 118 that are implanted for a short term, for example one week or less, a short-acting anti-inflammatory agent may be utilized. In catheters that are implanted for a longer term, for example more than a week and less than a month, a longer-acting anti-inflammatory agent may be used. In catheters that are implanted for longer than a month, a long-acting anti-inflammatory agent for example that is not water soluble, may be used.

In an exemplary embodiment fluid within balloon extensions 122 with semipermeable balloon extension skin 212 contain a drug or drugs, for example an antibiotic, that prevent and/or inhibit bacteria from colonizing tissue surrounding catheter 118. In catheters 118 that are implanted for a short term, for example one week or less, a narrow spectrum antibiotic may be utilized. In catheters that are implanted for a longer term, for example more than a week and less than a month, a wider spectrum antibiotic may be used. In catheters that are implanted for longer than a month, a wide spectrum antibiotic may be used, for example a new generation, single dose per 24 hour antibiotics.

Optionally, drug or drugs that prevent and/or inhibit aggregation of solids from body fluid, inflammation of body tissue and/or colonization of bacteria fluid may be introduced through catheter 118.

A desirable difference in structure of catheter 118 and balloon extensions 122 based upon length of implantation in vein 130, may be the attachment and flexibility between these two components. Balloon extensions 122 may be individually attached, for example with a glue, to catheter 118. Glue, for example, provides a less robust attachment between balloon extensions 122 and catheter 118. For example, when catheter 118 is used for a week in vein

130 and/or in an area of lower stress such as along a straight area of an extremity, attachment between balloon extensions 122 and catheter 118 may be with glue.

Balloon extensions 122, for example, may be designed so they are attached to a collar that, for example, surrounds and is attached to catheter 118. When catheter 118 is used in a vein 130 for a period of a month or more, attachment of balloon extensions 122 to catheter 118, for example, may be with a collar that surrounds catheter 118. Additionally or alternatively, when catheter 118 is used in an area of higher stress such as near a joint, for example the wrist, where there is a more movement, attachment of balloon extension 122 to catheter 118 may be with a collar.

Alternatively, catheter 118, comprises a flexible material, for example a silicone rubber, and/or rigid material, for example a metal or an epoxy. A determining factor of catheter 118 material, for example, may be the length of time that catheter 118 is placed in vein 130. During placement in vein 130 of periods less than a week, for example, catheter 118 and its extensions, may be of a rigid material as the irritation that accompanies rigid material does not have enough time to cause significant harm to surrounding tissue. However, when catheter 118 and its extension are placed in a vein 130 for periods longer than a week, for example, they may require flexible materials to prevent undue irritation to surrounding tissue.

Fig. 2B shows a frontal view of balloon extensions 122 of Fig. 2A within a cavity, 276 inside walls of vein 130. Expanded balloon extensions 122 push walls of vein 130 away from catheter front inlet 134. Three balloon extensions 122 allow for the expansion around the inner diameter of walls of vein 130. While three balloons are shown, alternative numbers are within the scope of this invention. For example, one balloon extension 122 may be provided, so that a portion of the circumference wall of vein 130 is caused to expand to remove and/or displace blockages that prevent passive fluid exchange and or fluid exchange under pressure. A design with a single balloon extension 122, for example, may be advantageous in that it is compact and may be easily manipulated in a cavity with a small bore, such as one millimeter in diameter. Alternatively, five or ten such balloon extensions 122 are provided, for example, for use in a vein 130 with more resilient walls, for example a hepatic vein.

In an exemplary embodiment, a portion of catheter 118 containing extension sections, such as balloon extensions 122, or other extension embodiments, is poked through skin 102 and into a body tissue, for example, vein 130. The portion of catheter 118 that is within vein 130, for example, is 2 centimeters in length. Additionally or alternatively, it could be as much

as four, eight or ten centimeters or as little as a half centimeter, for example, dependent upon the tissue type and or tissue cavity diameter.

In an exemplary embodiment, catheter 118 containing extension sections, such as balloon extensions 122, or other extension embodiments, is a hollow tube of a specific diameter, for example 3 millimeters, for introduction into vein 130 along the subject arm. However, the scope of the embodiments of this invention, relates to connection of catheter 118 to any size vein 130 and therefore it is contemplated to be of an appropriate size for introduction into vein 130 of any size. Depending upon the bore of vein 130 into which it is to be introduced, catheter 118, could be 5 millimeters, a centimeter, or as much as 5 centimeters in diameter. Alternatively, catheter 118 could be 3 millimeters, 1 millimeter or even a half-millimeter in diameter dependent upon the diameter of vein 130.

In an exemplary embodiment of the present invention, catheter 118 and balloon extensions 122, and/or other extension embodiments, comprise a biocompatible material, for example a biocompatible plastic. Additionally or alternatively, catheter 118 and/or its various extension embodiments are coated with a material that thwarts and/or does not promote aggregation of solid materials from body fluid. In an exemplary embodiment, catheter 118 and/or its various extension embodiments are coated, and/or impregnated, with a steroid that prevents and/or inhibits body inflammatory response. Additionally or alternatively, catheter 118 and/or its various extension embodiments are coated, and/or impregnated, with an antibiotic that prevents bacterial colonizing tissue surrounding catheter 118. The anti-aggregate, steroid and antibiotic, for example, are slow-release compounds that are released, for example, over the period in which catheter 118 is implanted in body tissue, for example several months.

In an embodiment of the present invention, fluid withdrawal takes place through catheter front inlet 134. Additionally or alternatively, fluid withdrawal occurs through one or more side openings 220 along catheter 118. Optionally, one or more side openings 220 are covered by one or more balloon extensions 122, or other extension embodiments, as they are near catheter 118 and open when extended away from catheter 118.

Additionally or alternatively, one or more side openings 220 are covered by body tissue such as wall of vein 130 when balloon extensions 122, or other extension embodiments, are near catheter 118. Side openings 220 are open and free of body tissue such as wall of vein 130 when balloon extensions 122 extend away from catheter 118. While side openings 220 are covered, they remain free of build-up or solid deposits from body fluid. When catheter front

inlet 134 becomes blocked, side openings 220 will, for example, provide alternative openings for fluid introduction and/or withdrawal.

5 Vein 130, for example, has weaker walls than an artery and other body tissue, for example, as well as a unique valve system that may be prone to being damaged. Due to these features of vein 130, expansion of balloon extensions 122 may be limited to a maximum diameter to prevent damage to surrounding tissue. For use in vein 130 with a small bore, for example an arm vein, balloon extensions 122 may move outward from catheter a maximum of 1 millimeter, while in vein 130 with a larger bore, for example a hepatic vein, balloon extensions 122 may move outward from catheter a maximum of 2 millimeters.

10 In an embodiment of the invention, different catheters 118 and balloon extensions 122 are placed in other blood vessels and/or body tissue besides vein 130. Each of these tissues can create different problems, which may make different catheter 118 designs desirable to ensure smooth fluid flow. Examples of tissue differences for which different designs of catheter 118 may be desirable, include: a) arteries, b) striated muscle, c) sensitive organ tissue.

15 For example, the multi-layered, robust nature of artery walls, may tend to impede extension of balloon extensions 122. Additionally or alternatively, in areas where collateral circulation is diminished or non-existent, balloon extensions 122 may cause impediment of blood flow that endangers the viability of surrounding tissue and/or organs.

20 Striated muscle may create pressure against an implanted catheter 118, causing impediment in fluid exchange and irritation and/or perforation of blood vessels. Further, disruption of fluid exchange with leakage into surrounding tissue may occur during contraction of the muscle.

25 Implantation of catheter 118 in or near sensitive tissue, for example may result in damage, perhaps of an irreversible nature. For example, if balloon extensions 122 press against nerve tissue, it may result in damage to the nerve, with resultant problems in nerve conduction, sensation and/or function.

30 To allow implantation within an artery, for example, where the walls are multi-layered and more robust, balloon extension 122 may move away from catheter 118 a maximum of several millimeters independent of the arterial bore. Additionally or alternatively, balloon extensions 122 comprises a material with greater resilience, resulting in greater extension force. In an artery, for example a coronary artery, with a small bore, balloon extensions 122 may simply be limited in the distance away from catheter 118 that they can expand away from catheter 118 by the configuration of the surrounding tissue.

Similarly, in a sac containing pus within a body tissue, for example a striated muscle, the walls around the sac may be of a robust nature that may limit the expansion of balloon extensions 122 to a specific diameter based upon the inside diameter of the sac. Furthermore, due to the robust nature of the tissue surrounding the sac, there may be less chance of balloon extensions 122 perforating into the surrounding tissue and, for example, spreading infectious material outside the sac. Hence, balloon extensions 122 may maximally extend 4 or more millimeters from catheter 118, being inhibited from reaching their maximum expansion by the pressure of the walls surrounding the sac.

The length of each balloon extension 122 of the embodiment using two or more balloon extensions 122, may vary in relationship to each other for use in cavities in which uneven circumferential expansion may be desired. In an embodiment of the invention, in extending balloon extensions 122 inside a pus pocket near nerve tissue such as the sciatic nerve, balloon extensions 122 may extend a millimeter away from catheter 118 on the side that is near the nerve while two or more millimeters away from catheter 118 on the side that is away from the nerve, for example to prevent nerve damage. Optionally, catheter 118 carries markings that allow an operator to determine the orientation of balloon extensions 122 so that the those that extend a shorter distance away from catheter 118 are located near the nerve tissue.

In an embodiment of the present invention, the one or more balloon extensions have an alternative shape to the balloon extension shown in Fig. 2B. For example, in Fig. 2C, a conical balloon extension 122 has a base 136 near catheter 118 and a bowed section 178 along wall of vein 130. Conical balloon extension 122 may be useful, for example, when the tissue against which it expands requires a more even, robust pressure, for example in a fluid sac located between lung tissue and the rib cage. Multiple balloon extensions 122 in such an application, for example, may cause irritation, and/or perforation of lung tissue.

While for clarity, catheter 118 is shown as being straight, it may be curved, bent or otherwise designed for appropriate introduction to any type of body cavity and still be within the scope of this invention. A curved catheter 118 may be useful, for example, in fluid exchange where the surrounding tissue tends to exhibit sharp curves, for example, in alveolar tissue. By incorporating a curved catheter 118 and/or a catheter 118 that is flexible, hence allows curvature to take place, damage to the tissue surrounding an alveolus may be reduced.

Catheter 118 with balloon extensions 122, or other extension embodiments, has application, for example, as a body ingress for insulin derivatives delivered to the body using, for example, an insulin pump. Additionally or alternatively, catheter 118 may be used for

lavage of a body organ, wherein sterile fluids are introduced and/or evacuated for the purpose of control of infection. In these latter two applications, catheter 118 is, for example, three or more centimeters in length, based upon the thickness of the body tissue it must traverse in order to reach its targeted fluid exchange area.

In an embodiment of the invention, catheter 118 may have a larger bore, for example 4 millimeters or larger, to accommodate evacuation of exudative material that is highly viscous. Additionally or alternatively, catheter 118 may have a narrower bore, for example one millimeter or less, in order to provide a stream of fluid entering an organ with high pressure that breaks up an infectious nidus so that it can be more efficiently evacuated from the body.

Fig. 2D illustrates still another design of balloon extension 122 where the one or more extensions are narrow with tips 156 that press wall of vein 130 when balloon extensions 122 are in an expanded state. This alternative embodiment allows fluid movement within the surrounding cavity even as balloon extensions 122 are expanded. Narrow tips 156 provide an advantage in arterial fluid exchange when catheter 118 is used in an artery where collateral arterial blood flow is missing and/or compromised and occlusion of the artery can cause tissue damage due to lack of blood flow. Narrow tips 156 allow blood flow to proceed even as balloon extensions 122 are extended.

Fig. 3 shows another embodiment of the present invention 300 where the extensions are one or more deformable extensions 312 that push walls of vein 130 away from catheter inlet 134, removing and/or displacing blockages, for example from tip 134 above, allowing fluid intake through catheter 118. Deformable extensions 312 have a first area 340 that maintains one position near catheter 118 and a second position near catheter 118 which pushes wall of vein 130 away from tip of catheter 134.

Deformable extension 312 has two ends, one end attached to a skin flat 316 and a second end attached to a catheter flat 322. Skin flat 316 projects beyond skin 102 so that it may be easily accessed, for example manually by an operator or by a mechanism, to move in direction 314. Catheter flat 322 is near catheter front inlet 134 and rests against a stop 320 that, for example, is attached to catheter 118. When skin flat 316 moves in direction 314, catheter flat 322 presses against stop 320 and pressure develops in direction 330. This results in deformation area 340 and deformable extension 312 extending away from catheter 118 which pushes walls of vein 130 away from catheter front inlet 134, allowing fluid withdrawal from a body tissue. In some cases, when pressure in direction 314 on skin flat 316 is diminished, the pressure of wall of vein 130 on deformable area 340 in a direction 390 becomes unopposed by pressure in direction 330 and deformable extensions 312 move toward catheter 118.

In an alternative embodiment, deformable extensions 312 comprise an elastic material that naturally maintains a bent position. This embodiment may be helpful in cases where, for example, there is highly resilient tissue surrounding deformable extension 312 and/or force by an operator or a mechanism may be insufficient to easily operate deformable extensions 312.

5 In this embodiment, a locking tab 344, for example, is incorporated into sheath 316 external to skin 102. Locking tab 344 presses against a notch 346, preventing movement of skin flat 316. When locking tab 344 is moved free of notch 346, as shown in Fig. 3, deformable extension 312 automatically extends in direction 330 due to the action of elastic material at deformable area 340. To return and maintain deformable extension 312 in the non-
10 expanded state, skin flat 316 is moved in direction 348 until locking tab 344 engages notch 346.

Fig. 4 is a side elevational view 400 of catheter 118 demonstrating multiple deformable extensions 312 and side opening 220. The number of deformable extensions 312, for example, may be one, two or even six or eight.

15 Fig. 5 is a schematic side view 500 of a catheter 118 with resilient extensions 502 which extend away from catheter 118 and exert pressure on walls of vein 130. In an embodiment of the present invention, resilient extensions 502 have two ends, an extension end 522 and an attachment end 520. Attachment end 520 is attached to catheter 118. Further, resilient extensions 502 are contained within a containment sheath 504, near catheter 118.
20 When containment sheath 504 is pulled in a direction 506, resilient extensions 502 are released from containment sheath 504. Extension end 522 extends away from catheter 118, exerting pressure on the walls of vein 130.

Optionally, one or more resilient extensions 502 have a catheter tip cover 530 that, when resilient extensions 502 are near catheter 118, prevent solids from fluid, such as blood, from building within catheter 118 and causing blockage of fluid exchange. As containment
25 sheath 504 is pulled in direction 506, resilient extensions 502 are released from containment sheath 504, extension end 522 extends away from catheter 118 and catheter tip cover 530 is freed from catheter front inlet 134 to allow exchange of fluid.

Fig. 6 illustrates catheter containment sheath 504 with catheter front inlet 134
30 surrounded by multiple resilient extensions 502 that are released from containment sheath 504. In an embodiment of the present invention, resilient extensions 502 have catheter tip covers 530 that each partially covers catheter front inlet 134, and together fully cover catheter front inlet 134. This arrangement of multiple, smaller, catheter tip covers 530, optionally allows catheter tip to be freed of catheter tip covers 530 with a smaller movement of resilient

extensions 502 than where there is a single, larger, catheter tip cover 530. This allows catheter front inlet 134 to be freed of catheter tip covers 530 when there is resilient tissue, for example, that somewhat resists movement.

While three resilient extensions 502 are shown, as many as six or ten are contemplated by the invention, or as few as one resilient extension 502 may be contemplated, varying according to the type of tissue, size of tissue cavity, resilience of tissue and/or other tissue qualities, for example noted above. Furthermore, all resilient extensions 502 may have catheter tip covers 530. Additionally or alternatively, some resilient extensions 502, one or none may have catheter tip covers 530.

The present invention has been described using non-limiting detailed descriptions of embodiments thereof that are provided by way of example and are not intended to limit the scope of the invention. It should be understood that features and/or steps described with respect to one embodiment may be used with other embodiments and that not all embodiments of the invention have all of the features and/or steps shown in a particular figure or described with respect to one of the embodiments. Variations of embodiments described will occur to persons of the art. For example, the method of attachment varies, for example, being adhesive based or using other mechanical attachment means such as screws or bolts. Furthermore, the terms "comprise," "include," "have" and their conjugates, shall mean, when used in the claims, "including but not necessarily limited to."

It is noted that some of the above described embodiments may describe the best mode contemplated by the inventors and therefore may include structure, acts or details of structures which may not be essential to the invention and which are described as examples. The structure and acts described herein are replaceable by equivalents which perform the same function, even if the structure or acts are different, as known in the art. Therefore, the scope of the invention is limited only by the elements and limitations as used in the claims.

CLAIMS

1. An apparatus that is pierced through a body tissue and implanted in a vein for the purpose of intake of fluid; comprising
- 5 a hollow tube with an aperture and one or more extensions that are operative to at least two positions near said aperture; with
- a first position near said aperture and a second position away from said aperture; wherein
- 10 extension of said extensions from said first position to said second position in relation to said aperture, displaces fluid intake impediments from said aperture.
2. Apparatus according to claim 1 wherein said aperture comprises an opening at said front end of said tube.
- 15 3. Apparatus according to claim 1 wherein said aperture comprises one or more openings in said side of said tube.
4. Apparatus according to claim 1 wherein said aperture comprises an opening at said front end of said tube and one or more openings in said side of said tube.
- 20 5. Apparatus according to any of the preceding claims wherein said impediment comprises an aggregate of solid material.
6. Apparatus according to any of the preceding claims wherein said impediment forms
- 25 beyond said hollow tube.
7. Apparatus according to any of the preceding claims wherein said impediment forms within said hollow tube.
- 30 8. Apparatus according to any of the preceding claims wherein said impediment comprises a venous valve.
9. Apparatus according to any of the preceding claims wherein said impediment comprises body tissue.

10. Apparatus according to claim 9 wherein said body tissue is inflamed.
11. Apparatus of any of the preceding claims wherein said hollow tube is implanted in a vein for the purpose of unimpeded intake of fluid for a period of one or more weeks.
12. Apparatus of any of the preceding claims wherein said hollow tube is implanted in a vein for the purpose of unimpeded intake of fluid for a period of one or more months.
13. Apparatus according to any of the preceding claims wherein said hollow tube includes one or more ports in addition to said aperture for withdrawal of fluid.
14. Apparatus according to any of the preceding claims wherein said rear end of said one or more extensions is attached to an activating mechanism.
15. Apparatus according to claim 14 wherein said activating mechanism causes said extensions to extend from said first position to said second position.
16. Apparatus according to claim 14 wherein said activating mechanism causes said extensions to extend from said second position to said first position.
17. Apparatus according to claim 14 wherein a portion of said activating mechanism comprises a locking mechanism that, when unlocked, allows said extensions to extend from said first position to said second position.
18. Apparatus according to any of claims 14-17 wherein a portion of said activating mechanism is external to said body tissue.
19. Apparatus according to any of claims 13-18 wherein a portion of said one or more extensions is external to said body tissue.
20. Apparatus according to any of claims 13-18 wherein the activating mechanism is manually activated.

21. Apparatus according to any of the preceding claims wherein the activating mechanism is automatically activated.
- 5 22. Apparatus according to any of the preceding claims wherein said extension of said extensions occurs prior to said fluid withdrawal.
23. Apparatus according to any of the preceding claims wherein said extension of said extensions occurs during said fluid withdrawal.
- 10 24. Apparatus according to any of the preceding claims wherein said extension of said extensions occurs following said fluid withdrawal.
25. Apparatus according to any of the preceding claims wherein said extension of said extensions takes place irrespective of fluid exchange.
- 15 26. Apparatus according to any of the preceding claims wherein the extension front of said one or more extensions, overlaps said front end of said tube when said extensions are either in a first position or a second position.
- 20 27. Apparatus according to any of the preceding claims wherein the front end of said tube overlaps the extension front of said one or more extensions when said extensions are either in a first position or a second position.
- 25 28. Apparatus according to any of the preceding claims wherein said apertures are periodically covered by said one or more extensions.
29. Apparatus according to any of the preceding claims wherein said apertures are periodically covered by said body tissue.
- 30 30. Apparatus according to any of the preceding claims wherein one or more of said catheter and said extensions comprise a material that prevents or retards aggregation of solids from said body fluid.

31. Apparatus according to any of the preceding claims wherein one or more of said catheter and said extensions comprise a material that prevents or retards clot formation.
- 5 32. Apparatus according to any of the preceding claims wherein one or more of said catheter and said extensions comprise a material that prevents or retards body tissue inflammatory response.
- 10 33. Apparatus according to any of the preceding claims wherein one or more of said catheter and said extensions comprise a material that prevents or retards body tissue inflammatory response.
34. Apparatus according to any of the preceding claims wherein one or more of said catheter and said extensions comprise a material that prevents or retards bacteria colonization.
- 15 35. Apparatus according to any of the preceding claims wherein one or more of said catheter and said extensions comprise a material that prevents or retards bacteria colonization.
- 20 36. Apparatus according to any of the preceding claims wherein the one or more extensions comprise balloons.
37. Apparatus according to claim 36 wherein said one or more balloons expand when filled with expansion fluid.
- 25 38. Apparatus according to any of the preceding claims wherein said activating mechanism consists of a reservoir containing expansion fluid connected to said one or more balloon extensions wherein said expansion fluid is periodically transferred from said reservoir to said one or more balloons, causing expansion of said one or more balloons.
- 30 39. Apparatus according to any of claims 36-38 wherein said expansion fluid contains a suspended material that prevents or retards aggregation of solids.
40. Apparatus according to any of claims 36-38 wherein said expansion fluid contains a suspended material that prevents or retards body inflammatory response.

41. Apparatus according to any of claims 36-38 wherein said expansion fluid contains a suspended material that prevents or retards bacteria colonization.
- 5 42. Apparatus according to any of claims 39-41 wherein said balloons are permeable to said suspended material.
43. Apparatus according to any of claims 1-31 wherein the one or more extensions comprise an extension with a deformable area.
- 10 44. Apparatus according to any of claims 1-31 or 43 wherein when said deformable area deforms, said extension extends from said first position to said second position.
45. Apparatus according to any of claims 1-31, 43 or 44 wherein when said extension extends from said second position to said first position, said deformable area returns to its pre-deformed state.
- 15 46. Apparatus according to any of claims 1-31 wherein the one or more extensions comprise resilient extensions.
- 20 47. Apparatus according to any of claims 1-31 or 46 wherein at least a portion of the activation mechanism for said one or more resilient extensions comprises a sheath.
48. Apparatus according to any of claims 1-31, 46 or 47 wherein;
- 25 said resilient extensions maintain said first position when at least a portion of said resilient sections is contained within said sheath; and
- said resilient extensions maintain said second position when at least a portion of said resilient sections is external to said sheath.
- 30 49. Apparatus according to any of claims 1-31 or 46-48 wherein;
- movement of said sheath from a position near said extension piece front to a position near said extension piece rear, causes at least a portion of said resilient extensions to exit said sheath; and

movement of said sheath from a position near said extension piece rear to a position near said extension piece front, causes at least a portion of said resilient extensions to enter said sheath.

- 5 50. Apparatus according to any of the preceding claims wherein said fluid withdrawal comprises fluid introduction into said vein.

51. Apparatus according to any of the preceding claims wherein said tube is implanted in a body tissue.

10

52. Apparatus according to claim 51 wherein said body tissue comprises one of the following: a vein, a venous sinus, an artery, or an area containing fluid such as a pleural sac, an infectious sac and an alveoli.

60367263-032602
209250-19279409

ABSTRACT OF THE INVENTION

An apparatus that is pierced through a body tissue and implanted in a vein for the purpose of unimpeded intake of fluid comprising a hollow tube with an aperture and one or more extensions that are operative to at least two positions near said aperture, with a first position near said aperture and a second position away from said aperture, wherein extension of said extensions from said first position to said second position in relation to said aperture, displaces fluid intake impediments from said aperture.

60367463-032602

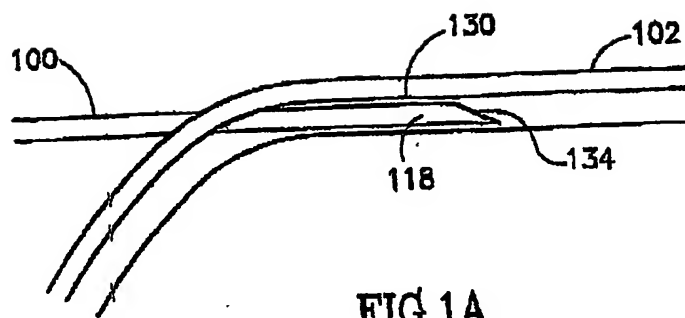


FIG. 1A

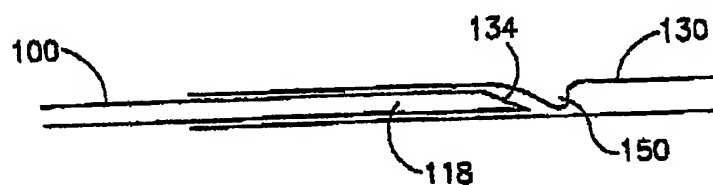


FIG. 1B

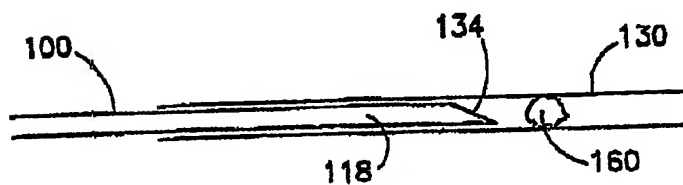


FIG. 1C

20220709 032602 60367263

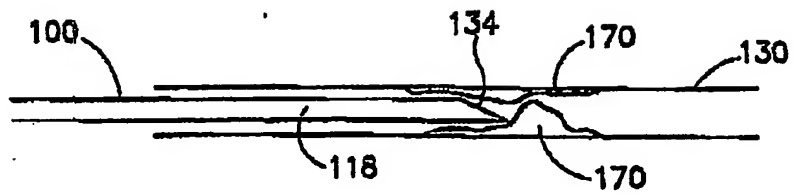


FIG. 1D

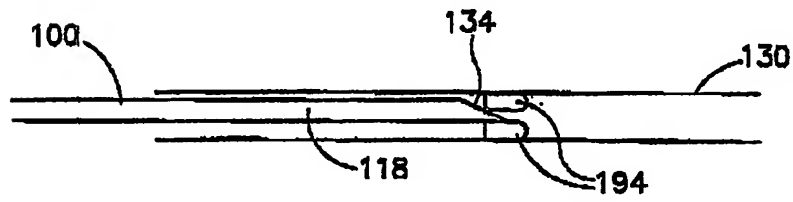


FIG. 1E

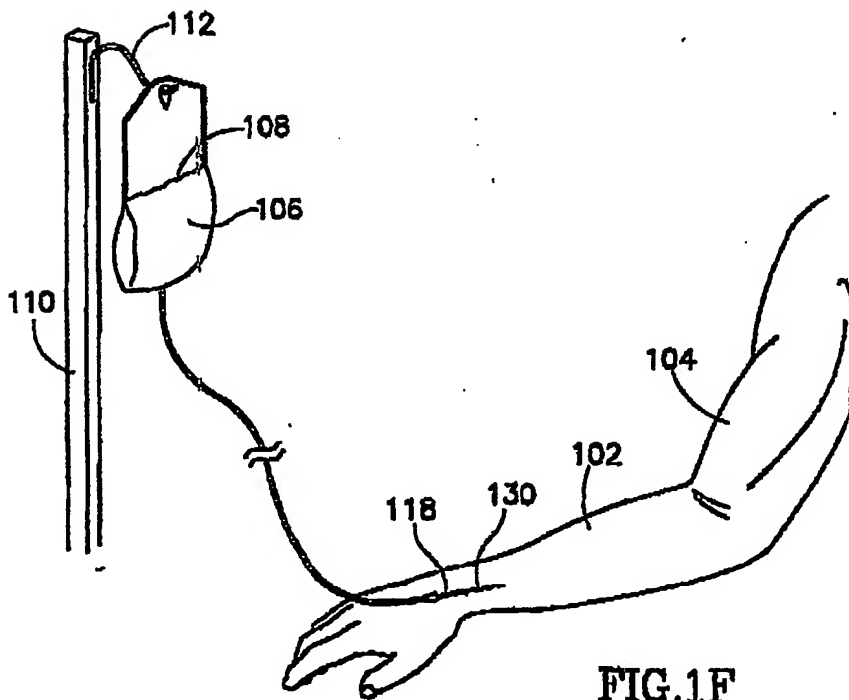


FIG. 1F

60367263-00-59279509

60367263-032602

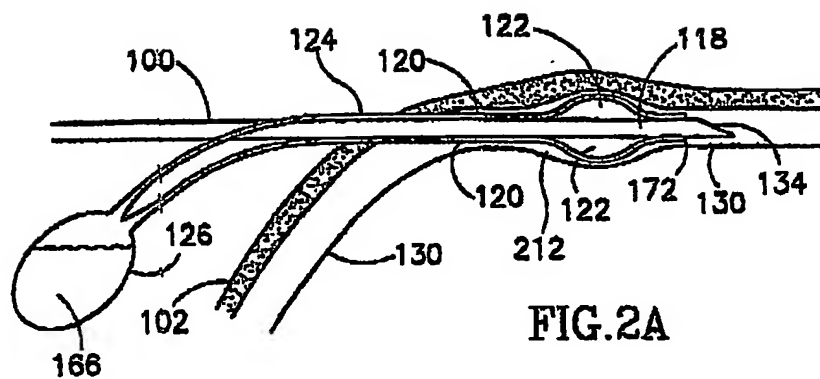


FIG. 2A

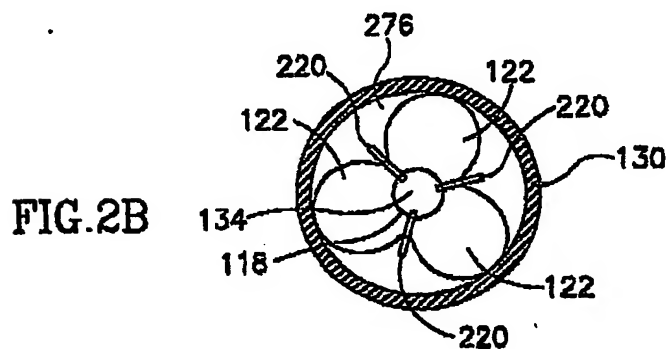


FIG. 2B

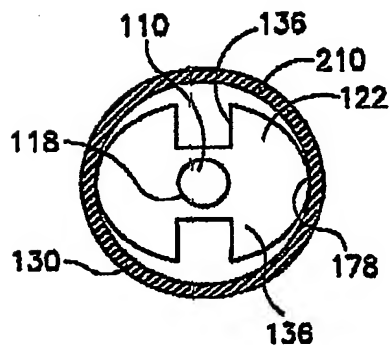


FIG. 2C

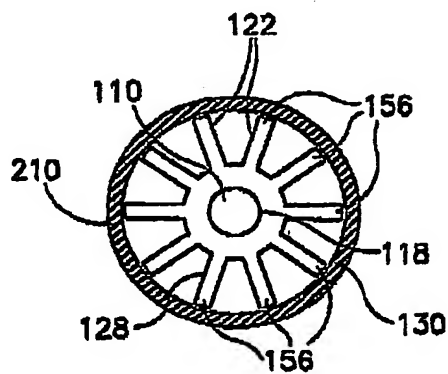


FIG. 2D

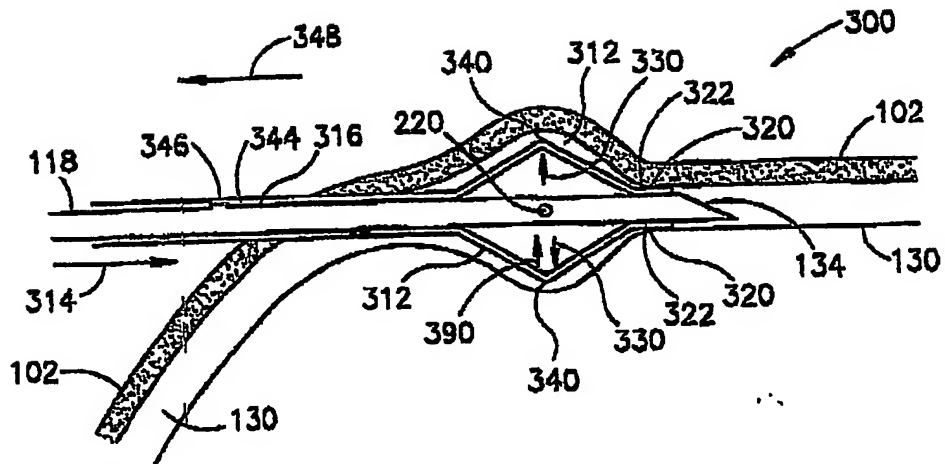


FIG. 3

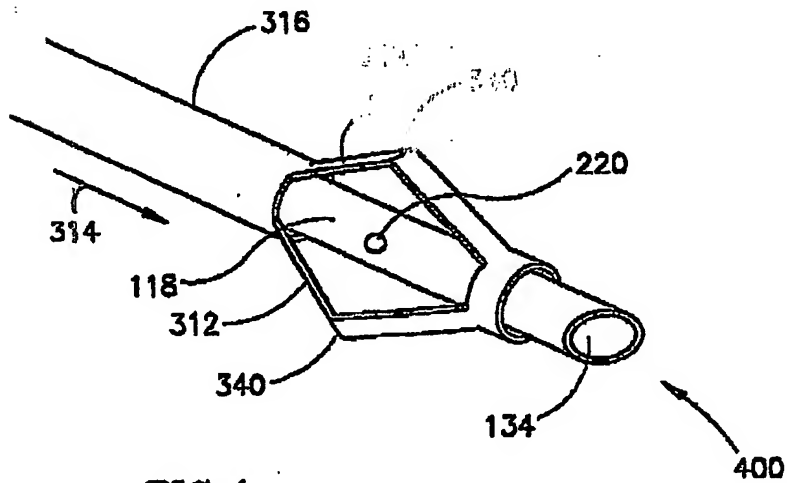


FIG. 4

